



The  
Patent  
Office

PCT/GB 99/00262

09/582253

GB 99/262

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP9 1RH

REC'D 25 MAR 1999

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

-3 MAR 1999

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

123450

Patents Form 1/77

Patents Act 1977  
(16)

The Patent Office

THE PATENT OFFICE  
A

26 MAR 1998

RECEIVED BY FAX

26MAR98 E348656-1 D00318  
P01/7700 25.00 - 9806428.0

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

AJL/IR/P4027

2. Patent application number

(The Patent Office will fill in this part)

9806428.0

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Ultraframe (UK) Limited,  
Enterprise Works,  
Salthill Road,  
Clitheroe,  
Lancashire. BB7 1PE

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Connecting Device

5. Name of your agent (if you have one)

ROYSTONS

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Tower Building  
Water Street  
Liverpool  
L3 1BA

Patents ADP number (if you know it)

1438001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application


Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

**Patents Form 1/77**

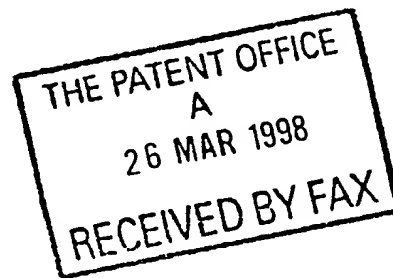

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 5

Claim(s) -

Abstract -

Drawing(s) 3

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) -

Request for preliminary examination and search (Patents Form 9/77) -

Request for substantive examination (Patents Form 10/77) -

Any other documents -  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 26.03.98

ROYSTONS - AUTHORISED AGENTS

12. Name and daytime telephone number of person to contact in the United Kingdom

A. J. Lyons. - 0151 236 1417/5147

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

TITLE: Connecting Device

DESCRIPTION

This invention concerns connecting devices, especially connecting devices for attaching pipes or other elongate items to underlying surfaces, such as to walls.

A down pipe for delivering water collected in a gutter to a drain is usually attached to a wall using clips that are secured to the wall and fastened around the down pipe. Available clips are of one size and so do not allow for variations in spacing between the down pipe and the wall which occur due to irregularities in the wall and the relative positioning of the guttering to which the down pipe is connected at its top. Because of the above, sometimes clips cannot be fastened properly and so spring open or strain is put on the down pipe affecting its connection to the guttering or its other fastening clips.

An object of this invention is to provide a connecting device especially but not exclusively suitable for attaching a pipe to a surface.

According to this invention there is provided a connecting device suitable for attaching a pipe to a surface comprising a first part fixable to the wall and a second part attachable to the first part and forming an at least partial enclosure for the pipe, the attachment of the second part to the first part being selectively adjustable, whereby spacing of the pipe from the surface may be adjusted.

The first part of the connecting device of the invention is preferably U-shaped

providing a base which is arranged to be fixed to the surface, such as, for example, by means of one or more screws or the like through provided holes in the base, and arms extending from the base.

The second part of the connecting device of the invention is preferably also U-shaped having a base and an arm extending from each end of the base. The arms of the first and second parts of the connecting device of the invention are preferably selectively interengageable. The inner faces of the arms of one part preferably have a series of spaced teeth which are selectively engageable between corresponding teeth on outer faces of the arms of the other connecting device part.

The teeth of the outer faces of the arms of the other connecting device part, preferably the second part are preferably within channels in the arms, so that the arms of one part fit into the corresponding channels of the arms of the other part when the respective series of teeth are interengaged.

The respective series of teeth are preferably arranged so that the two parts of the connecting device of the invention can only be engaged to a limited extent in order to prevent them from slipping past each other. Thus, abutments may be provided on each arm for the teeth of an arm of the other part of the device with which it is to engage. The abutments may be provided by base strips from which the teeth of each arm extend. Alternatively, the teeth may be shaped, such as by being triangular in plan, whereby their extent of movement together is limited by said shaping.

The second part of the connecting device of the invention preferably has inwards returns at the ends of its arms, so that a pipe or the like is retained in said

## 3

second part.

The connector device of the invention is preferably used by fixing the first part to a surface and sliding the second part onto a pipe and down onto the first part to engage the two parts and hold the pipe to the surface. The second part will engage the first part at a desired spacing from the pipe from the surface.

This invention will now be further described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a perspective view from above of a down pipe connecting device according to the invention;

Figure 2 is a perspective view from below of the connecting device of Figure 1;

Figure 3 is a part cut away perspective view from above of the connecting device of Figure 1;

Figure 4 is a perspective view from below of the connecting device of Figure 1 fitted to a down pipe;

Figure 5 is a perspective from above of the connecting device of Figure 1 fitted to a down pipe;

Figure 6A to D shows steps in fitting a connecting device of Figure 1 to a down pipe.

Referring to the accompanying drawings, a connecting device or clip 10 for securing a down pipe 11 to a wall or other surface, such as a mullion or corner post of a glazed conservatory wall, comprises two parts 12 and 14. The two parts 12, 14 are generally U-shaped and shaped to fit together in an overlapping fashion.

4

The one part 12 has a base 16 and sides 18 extending generally normally from the base. The base 16 is provided with a screw hole 20 so that it can be secured to a wall or other suitable surface. The sides 18 have on their facing surfaces spaced teeth 22 extending upwards from a base strip 24.

The other part 14 of the clip has a base 26 and sides 28 that turn inwards at their ends 30 to a small extent. The part 14 has its internal corners rounded to correspond to the shape of conventional square section down pipes. Of course, the part 14 of the clip may be of any desired shape, such as to fit circular section pipes. On their internal surfaces, the base 26 and sides 28 and each have a pair of spaced ribs 32. The ends 30 of the sides 28 each also have on their internal surface at the end thereof a rib 34. The ribs 32 and 34 simply facilitate the fitting of the clip to a downpipe by reducing areas of contact and hence reducing friction between the clip and the down pipe.

The sides 28 of the second clip part 14 are wider over a major portion of their length up to their free ends and the wider portions are slotted from below to form channels 42. On the inside of each channel 42 on one face thereof from a base strip 43 extend a series of spaced teeth 44 shaped and sized to interfit between the teeth 22 of the sides 18 of the one part 12. Thus, the second part 14 can be slid down onto the first part 12 with the teeth of the one part engaged with the teeth of the other part at a desired position to give a desired spacing of the second part from the base 16 of the first part. The respective base strips 24 and 43 limit the extent of interengagement of the teeth.

The clip 10 is used in the following manner as shown in Figures 6A to 6D of




5

the accompanying drawings to fix a down pipe to a wall or other suitable surface. Firstly the first part 12 is fixed to the wall or other suitable surface at a desired location using a screw through the base 16. Then the second part is placed on the down pipe and the down pipe positioned, which may involve coupling thereof to a gutter. The second part of the clip is then slid down onto the first part so that their respective teeth interengage. The two parts of the clip may lock together simply by friction, by mechanical fixings or by engagement of integral locking components.

It will be appreciated that whilst the connecting device of the invention has been described in relation to connecting down pipes to a structure, the connecting device of the invention may be used for connecting other elongate items to an underlying structure in any orientation.

**THIS PAGE BLANK (USPTO)**

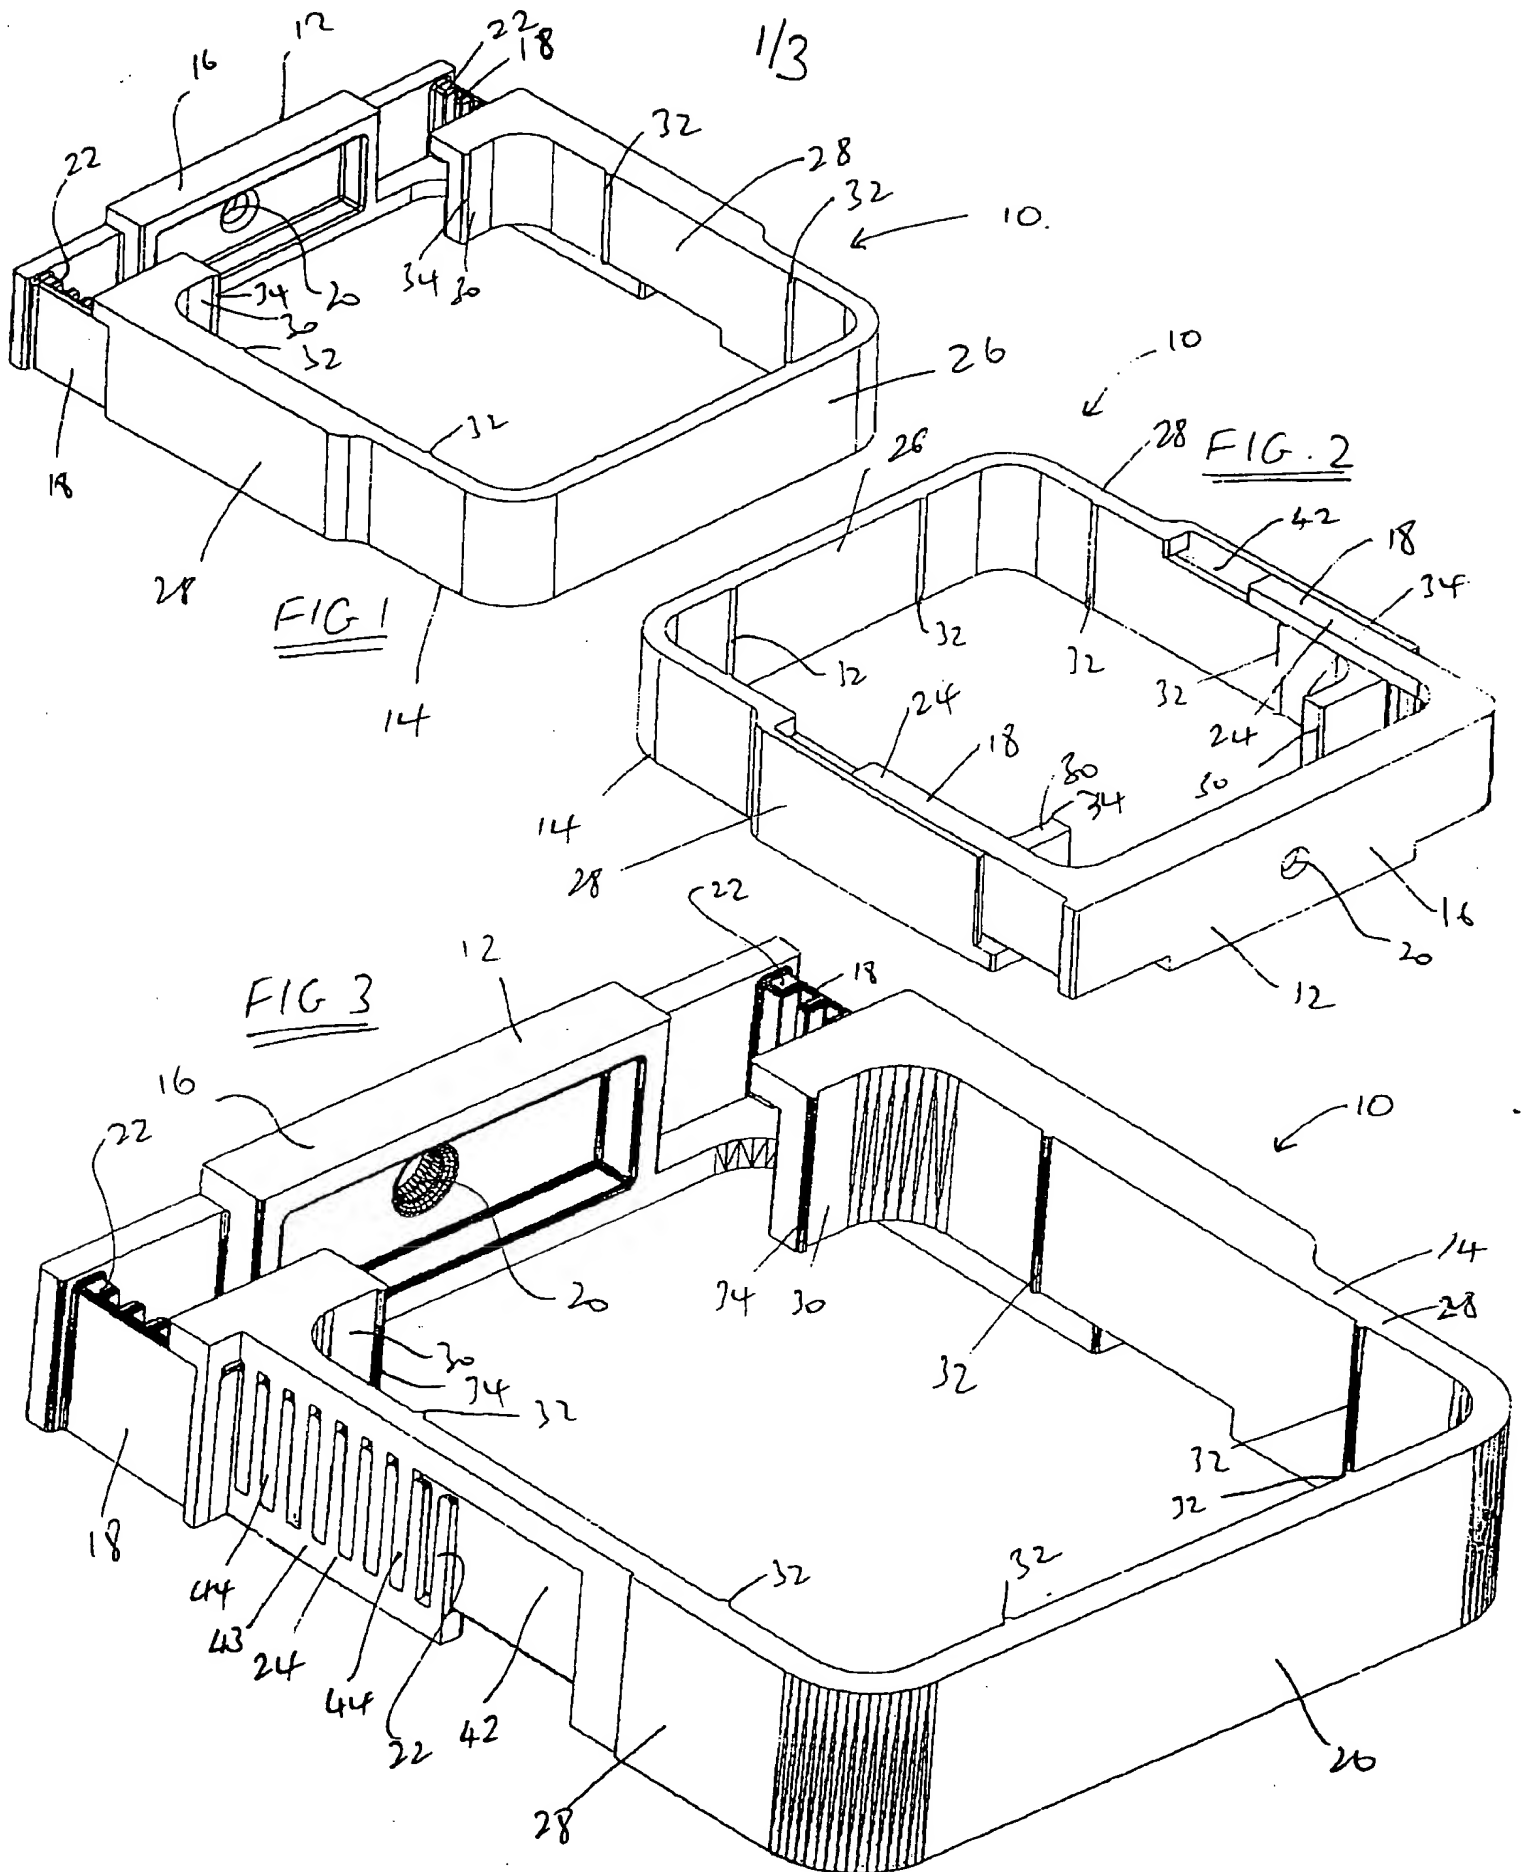

**THIS PAGE BLANK (USPTO)**

2/3


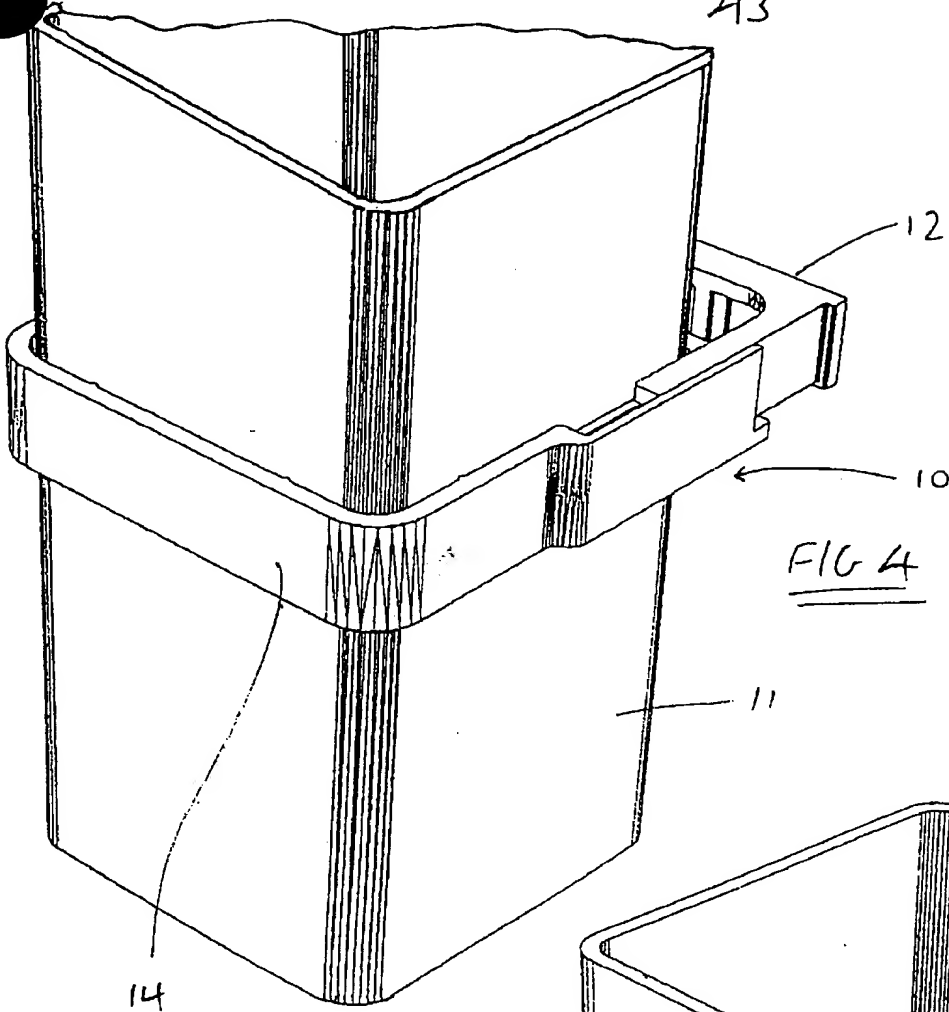


FIG. 4

FIG. 5

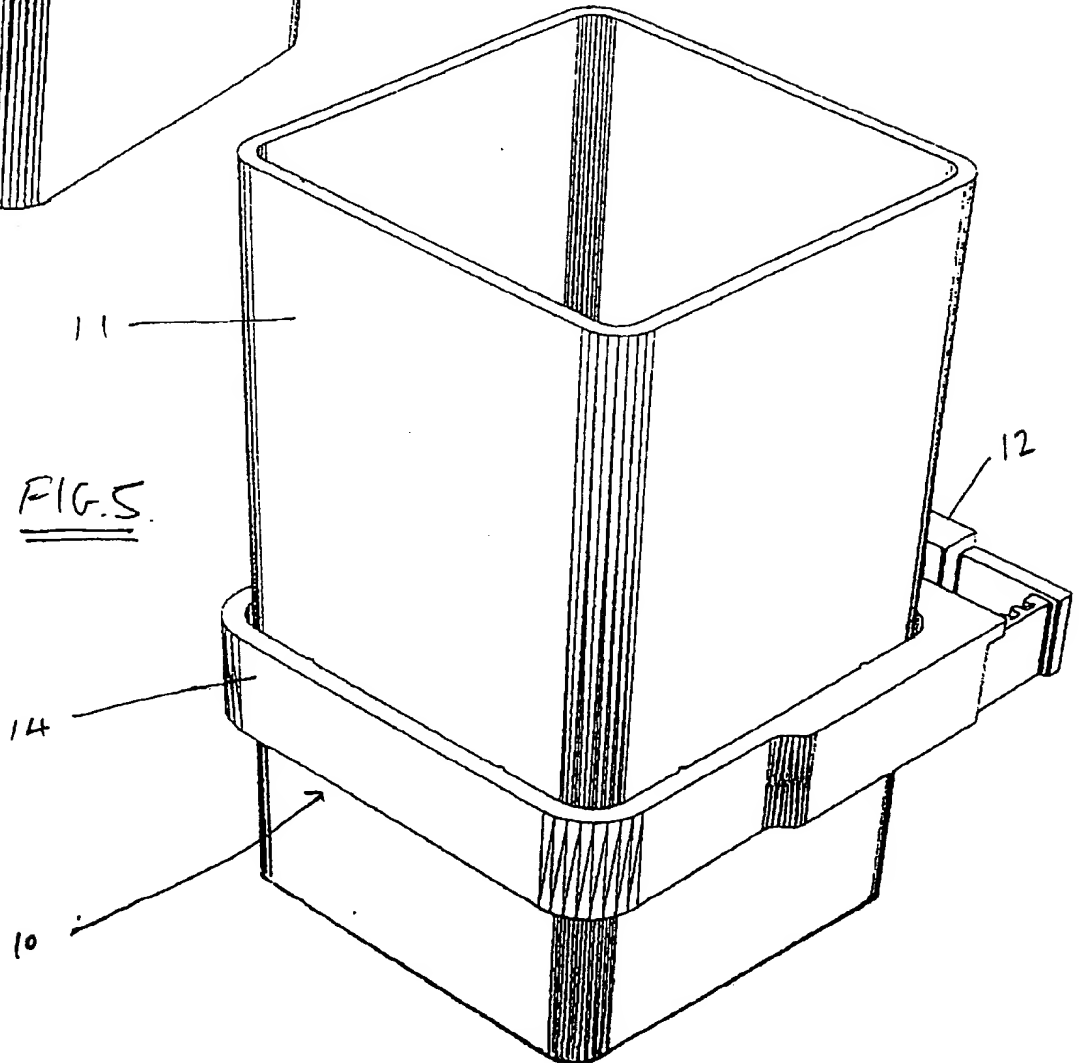

**THIS PAGE BLANK (USPTO)**

3/3

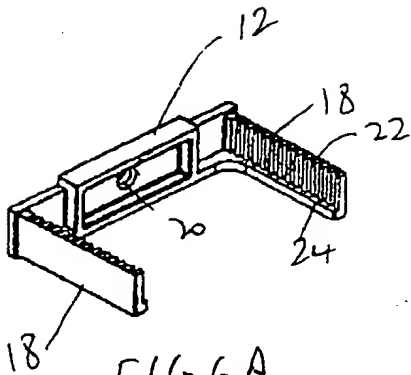


FIG 6A




FIG 6B

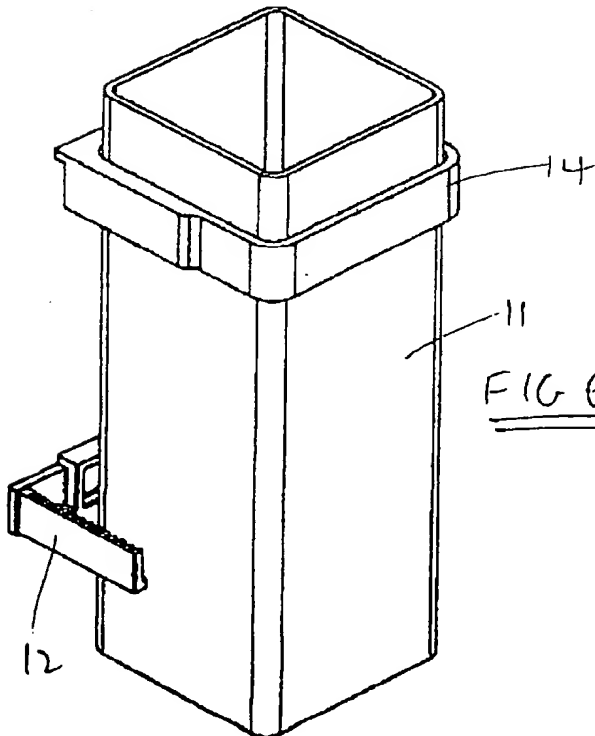
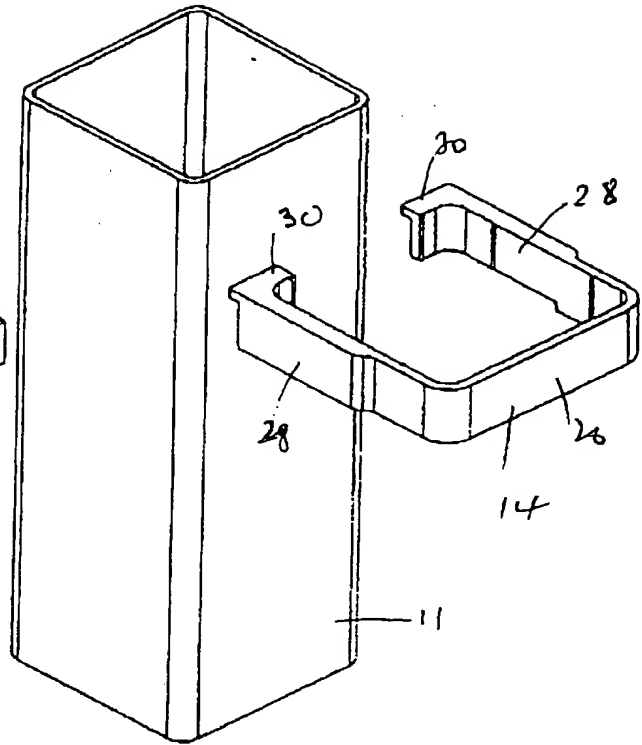


FIG 6C

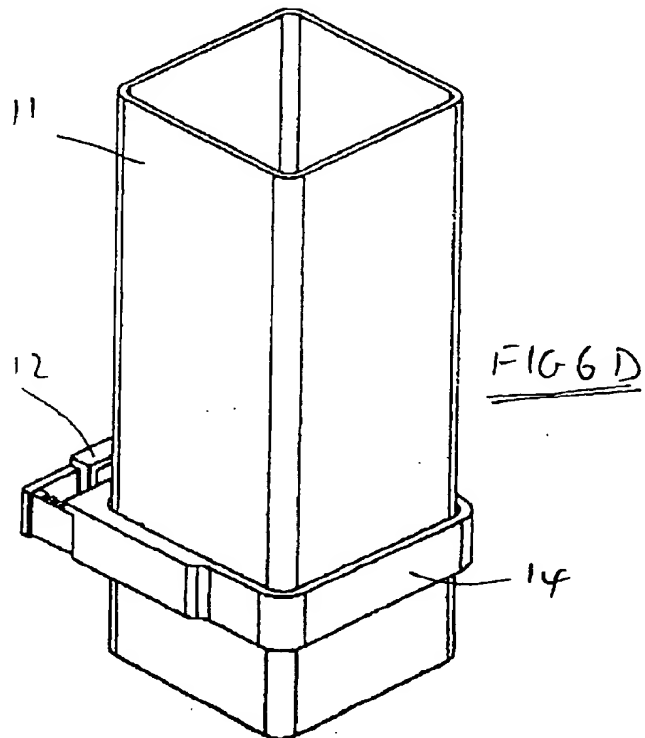


FIG 6D

**THIS PAGE BLANK (USPTO)**



**THIS PAGE BLANK (USPTO)**

PCT / GB 99 / 00262

F23/77 24. 2. 99

Agent Roystons